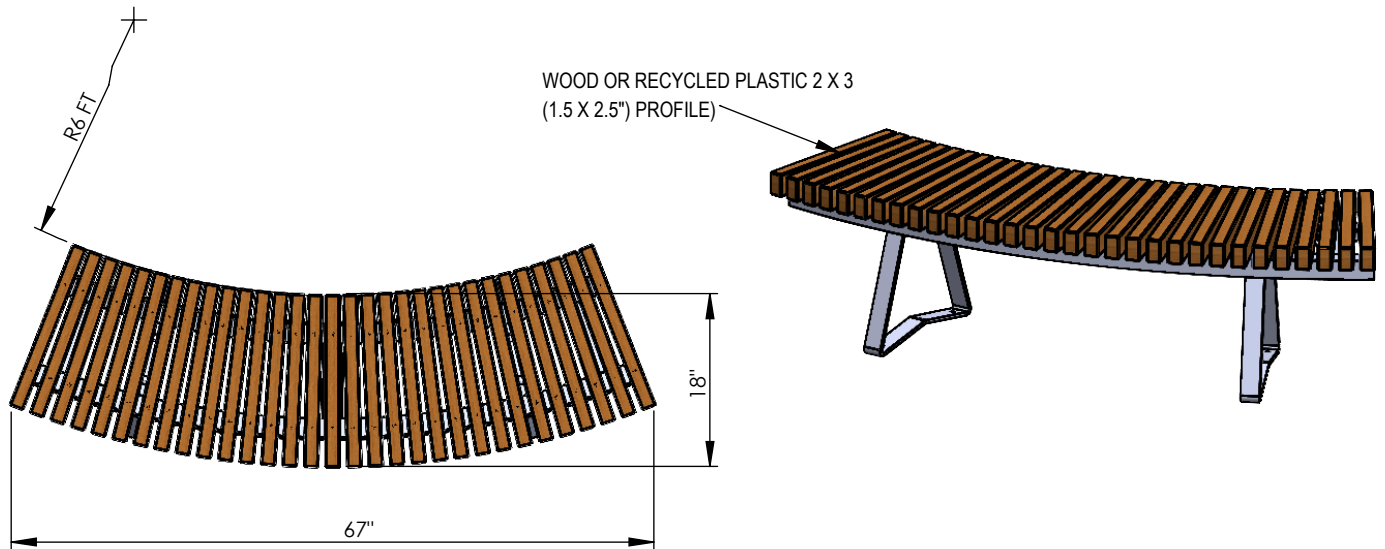


GRADE

ORDERING GUIDELINES:

1. PREFERRED MINIMUM INSIDE RADIUS IS 6 FEET.
2. SPECIFY IF THE BENCHES ARE TO BE ATTACHED END TO END
3. IT IS RECOMMENDED THAT THE BENCHES BE ANCHORED.

PRODUCT: OLFC-6RX6-(ER, RP, WI)23-FS

DESCRIPTION: OLBRICH FLAT BENCH, 6' RADIUS, APPROX 6' LONG

DATE: 06-22-2022

ENG: BLW

CONFIDENTIAL DRAWING AND INFORMATION IS NOT TO BE COPIED OR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF GRABER MANUFACTURING, INC. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©2022 GRABER MANUFACTURING, INC. ALL PROPRIETARY RIGHTS RESERVED.

SITE FURNISHING IS POWDER COATED WITH TGIC POLYESTER. STEEL SURFACE PREP INCLUDES MECHANICAL AND CHEMICAL ETCHING FOLLOWED WITH A COATING TO IMPROVE ADHESION AND CORROSION RESISTANCE.